



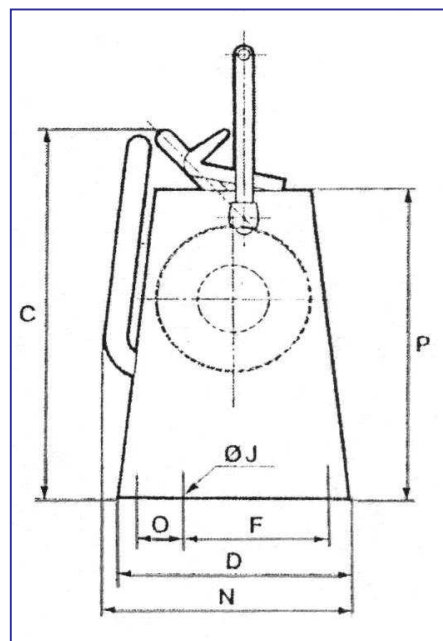

Portata S.W.L.	tipo type	rapporti velocità velocity ratio	fune rope *	massima fune avvolgibile max. wrapped	svolgimento fune per giro manovella rope winding off for crank turn	peso weight
kg.		n.	mm.	m.	mm.	kg.
600	<b>006AVH</b>	1	5	346	89	70
1.500	<b>015AVH</b>	2	8	81	90	85
2.000	<b>020AVH</b>	2	10	169	78	110
3.000	<b>030AVH</b>	2	12	138	88	170
5.000	<b>050AVH</b>	2	16	223	44	360
7.500	<b>075AVH</b>	2	18	403	40	550
10.000	<b>100AVH</b>	2	22	561	40	1.100

\* coefficiente sicurezza 3

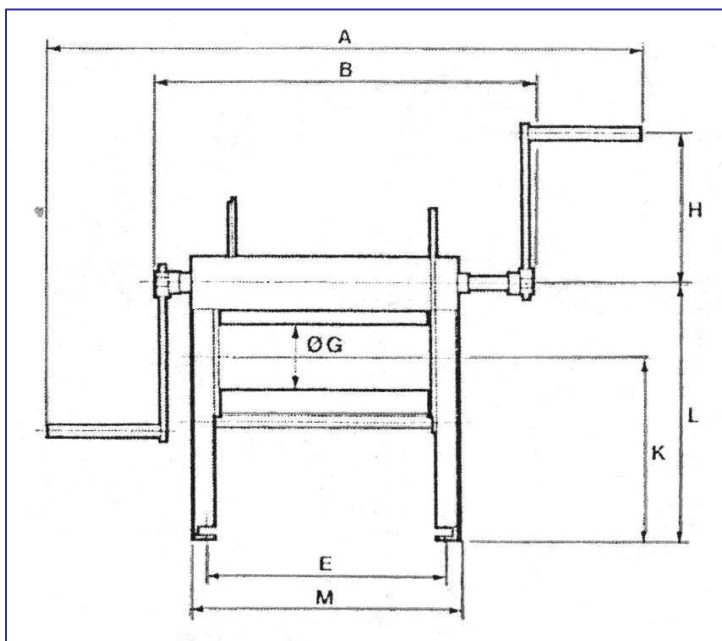

Portata S.W.L. kg.	tipo type	A	B	C	D	E	F	Ø G
600	<b>006AVH</b>	1235	715	770	460	460	310	133
1.500	<b>015AVH</b>	1322	802	870	480	524	330	133
2.000	<b>020AVH</b>	1415	895	890	500	580	320	159
3.000	<b>030AVH</b>	1800	995	1030	600	677	380	168
5.000	<b>050AVH</b>	2260	1200	1000	680	798	400	245
7.500	<b>075AVH</b>	2455	1370	1090	815	990	540	324
10.000	<b>100AVH</b>	2920	1845	-	1210	1565	600	355

Portata S.W.L. kg.	tipo type	H	Ø J	K	L	M	N	O	P
600	<b>006AVH</b>	360	15	460	605	515	440	50	645
1.500	<b>015AVH</b>	360	20,5	490	680	580	500	50	705
2.000	<b>020AVH</b>	360	20,5	470	660	645	520	100	720
3.000	<b>030AVH</b>	480	22	477	707	745	610	100	780
5.000	<b>050AVH</b>	406	24	335	775	880	-	140	850
7.500	<b>075AVH</b>	406	28	350	900	1080	-	140	960
10.000	<b>100AVH</b>	406	20,5	430	882	1665	-	250	1000